



VENDED LAUNDRY T-450 EXPRESS WASHER



T-450 EXPRESS WASHER

Dexter C-Series Washer Powered by DexterLive Controls

Vended laundry solutions you can depend on.

Dexter C-Series washers are engineered to show up for work in even the harshest laundry environments. Featuring DexterLive controls, next generation components, and high quality materials, each C-Series washer is designed to help make you more successful.

A store full of laundry equipment is a big investment and choosing the right equipment is an important decision. Our products will provide you the efficiency, flexibility, performance, and durability you need to be confident in your choice. With lifetime technical support and an industry leading 10 year limited warranty, you can be confident that we will stand behind every washer you invest in.

Contact your Dexter Authorized Distributor today for more details.

DURABLE:

With heavy-duty bearings in a cast iron bearing housing, a welded steel spider and shaft, and a rugged frame design that has been proven over two decades, Dexter washers are built to last.

Every model is tested thoroughly with our 1,000 hour out-of-balance test.

The polished chrome doors and AISI 304 stainless steel tub, cylinder, top, front, and side panels keep washers looking great year after year.

RELIABLE:

Our industry leading 10 year warranty covers the frame, tub, cylinder, shaft, seals, bearings, and bearing housing.

A 3 year parts warranty covers the rest.

We stand behind every machine you invest in with lifetime technical support.

EFFICIENT:

Perforated cylinders and raised baffles create superior wash action, while the efficient washer design saves water on every cycle.

Next generation inverter drives lower electrical usage, improve performance, and extend the life of the motor.

Powerful Express 200 g-force extraction removes more water to reduce dry time and helps reduce energy costs.

INSTALLATION:

Adjustable final extract speeds and other customizable options allow Dexter washers to fit almost any installation.

This Dexter washer fits through a standard 36" doorway.

PROFITABLE:

Every Dexter machine is now easier to use with a common user interface on all products, multiple language options, and detailed customer prompts.

DexterLive controls work with DexterLive.com to allow you to create custom programs that fit your business.

A variety of PLUS cycle features and promotion options will help you maximize revenue generation.

OPTIONS:

Available with blue or black graphics.

Your washer can be shipped with coin acceptors or payment system ready.

Dexter C-Series 200G Express washers are available in 20lb, 30lb, 40lb, 60lb, and 90lb capacities.

EMPLOYEE OWNED | MADE IN THE USA | SINCE 1894

DEXTER.COM

2211 WEST GRIMES AVENUE, FAIRFIELD, IOWA 52556 USA

1.800.524.2954

T-450 EXPRESS WASHER SPECIFICATIONS

VENDED LAUNDRY

Capacity:

| | | |
|---------------------|-----------|-----------|
| Dry Weight Capacity | 30 lb | (13.6 kg) |
| Cylinder Volume | 3.8 cu ft | (107.6 L) |

Speed:

| | | |
|----------------------------|-------|-----------|
| High Extract Speed | 200 g | (750 RPM) |
| Intermediate Extract Speed | 60 g | (411 RPM) |
| Washing Speed | 0.9 g | (50 RPM) |
| Motor Size | 2 hp | (1.5 kW) |

Dimensions:

| | | |
|----------------------|----------|------------|
| Cabinet Height | 48 3/16" | (122.4 cm) |
| Cabinet Width | 29 7/8" | (75.9 cm) |
| Cabinet Depth | 28 1/4" | (71.8 cm) |
| Door Opening | 15 1/4" | (38.7 cm) |
| Floor to Door Bottom | 16 1/4" | (41.3 cm) |
| Cylinder Diameter | 25" | (63.5 cm) |
| Cylinder Depth | 13 3/8" | (34 cm) |

Weight:

| | | |
|------------|---------|------------|
| Net Weight | 526 lbs | (238.6 kg) |
|------------|---------|------------|

Shipping Information:

| | | |
|-----------------|---------|------------|
| Shipping Weight | 544 lbs | (246.8 kg) |
| Shipping Height | 53 1/4" | (135.3 cm) |
| Shipping Width | 31 1/2" | (80 cm) |
| Shipping Depth | 33 1/2" | (85.1 cm) |

Water Requirements:

| | | |
|---|------------|---------------|
| Water Inlet Size | 3/4" | (19 mm) |
| Flow Rate (per min) | 9 gal | (34.1 L) |
| Pressure (min/max) | 30-120 psi | (207-827 kPa) |
| Approximate Water Usage (per cycle) | 24.1 gal | (91.2 L) |
| Approximate Hot Water Usage (per cycle) | 8.5 gal | (32.2 L) |
| Drain Diameter (O.D.) | 3" | (7.6 cm) |
| Floor to Center of Drain | 5" | (12.7 cm) |


Electrical Requirements:

| Model | Volts / Hz / Phase / Wiring | Circuit Breaker / Running Amps / Wire Size |
|-------|------------------------------------|--|
| -12 | 208-240 / 60 / 1 / 2 wire + ground | 15 amp / 6.2 amp / #12 |
| -12 | 208-240 / 60 / 3 / 3 wire + ground | 15 amp / 6.2 amp / #12 |
| -39 | 230 / 50 / 1 / 2 wire + ground | 15 amp / 6.2 amp / 3.5 mm ² |

Installation Recommendations:

| | | |
|------------------------------------|------|-----------|
| Minimum Clearance Between Machines | 1/2" | (1.3 cm) |
| Minimum Clearance Behind Machines | 24" | (61 cm) |
| Minimum Concrete Thickness | 6" | (15.2 cm) |

Agency Approvals*

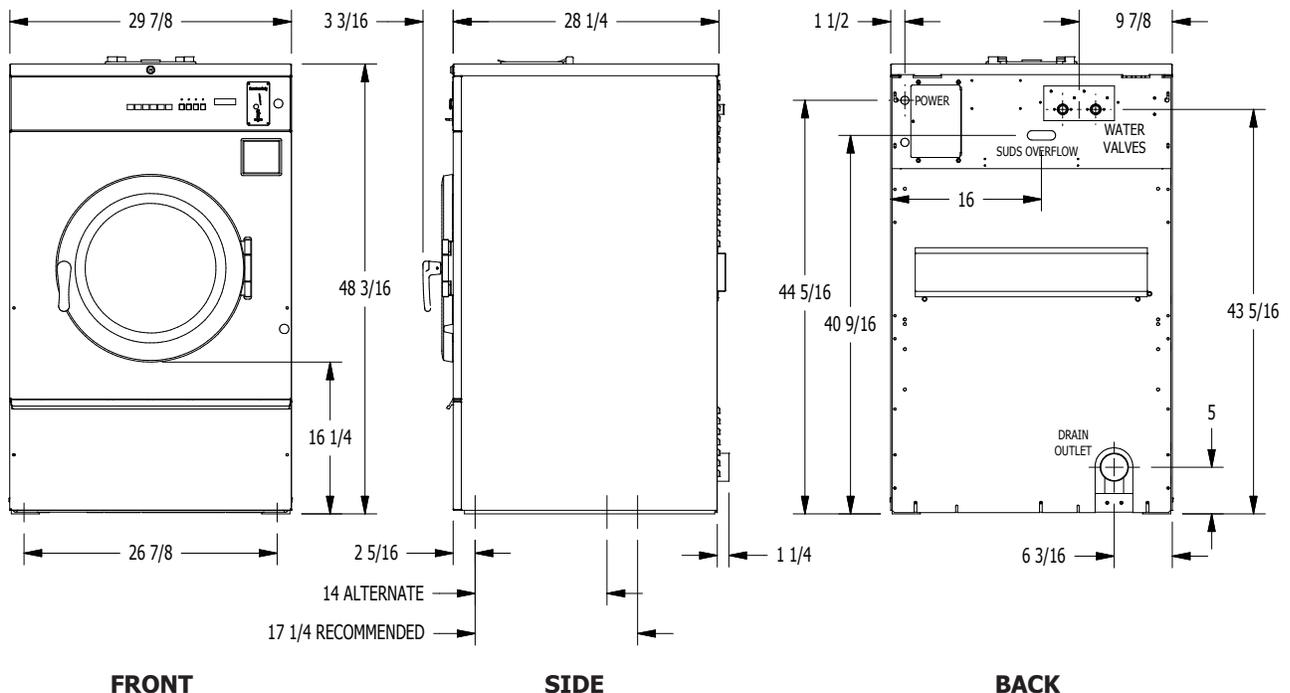

Due to continuous product improvements specifications are subject to change, please consult the installation manual for the most accurate information.
 *Agency approvals may vary depending on the machine configuration, consult Dexter Laundry or your Dexter Authorized Distributor for details.